


Wall Box 2-Ports UTP Cat6A Jack

Model: LP-WP-39-C6A

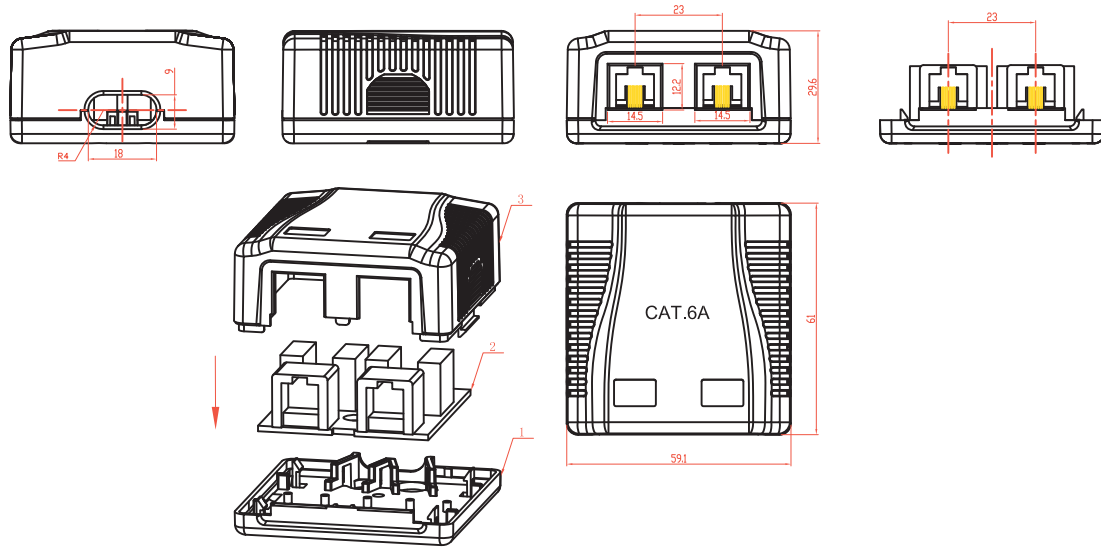

Specifications:

Electrical:

1. Voltage Rating: 125 VAC RMS
2. Current Rating: 1.5 AMP
3. Contact Resistance: 100 MILLIOHMS MAX
4. Insulation Resistance: 1000 MEGOHMS MIN @500 VDC
5. Dielectric Strength: 750 VAC RMS 60 Hz, 1MIN

Enviromental:

1. Storage: -40° to +85°
2. Operation: 0° to 70°

Mechanical:

1. Housing Material: ABS
2. Insert Material: Flame Retardancy ABS
3. PBC Material: FR-4 T= 1.6mm
4. Contact Material: Phosphor Bronze Stamp PIN T=0.30mm
5. IDC Contact Material: Phosphor Bronze T= 0-50mm with Tin Plating
6. RJ45 Jack LIFE: 750 TIMES MIN

Tolerance

Quantity Range	Tolerance
0. 00-20. 00	±0. 10
20. 00-50. 00	±0. 15
50. 00-100. 00	±0. 20
100. 00-	±0. 25
Angle	±30'

Notes

Material	Angles Projection	
ABS	Size	A4
	Scale	X:1
	Unit	mm

